



3 year guarantee


RESCUE

CE 0082 UK CA 0120 UIAA
XF 494-2004: FZL-H-T 9.5/13

EN 12278: 2007 7 $\leq \varnothing \leq 13 \text{ mm}$
individually tested

1. Field of application (text part) Champ d'application (partie texte)

2. Nomenclature Nomenclature

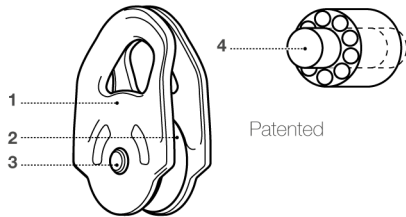

NFPA CERTIFICATION FOR RESCUE P50
MEETS THE PULLEY REQUIREMENTS OF NFPA 1983, INCORPORATED IN THE 2022 EDITION OF NFPA 2500.
RÉPOND AUX EXIGENCES NFPA 1983, DE L'ÉDITION 2022 DE LA NFPA 2500 POUR LES POULIES.




**PULLEY: MBS 36 kN
G (GENERAL USE)
MEETS NFPA 2500
(1983) - 2022**

After removing the notice from the equipment, make a copy of it and keep the original as part of a permanent record that includes the usage and inspection history for the equipment. Keep the copy of the notice with the equipment and refer to it before and after each use. Additional information regarding auxiliary equipment can be found in NFPA 1500 and NFPA 1858 and NFPA 1983, incorporated in the 2022 edition of NFPA 2500.


Après avoir retiré la notice de l'équipement, en faire une copie et copier et conserver l'original dans un dossier permanent qui comprend l'historique de l'utilisation d'utilisation et d'inspection de l'équipement. Conservez la copie de la notice avec l'équipement et consultez-la avant et après chaque utilisation. Des informations complémentaires sont disponibles dans la NFPA 1500, NFPA 1858 et NFPA 1983, incorporées dans l'édition 2022 de la norme NFPA 2500.

5. Strength Résistance


5A. Working load limit / Valeur d'utilisation maxi




5B. Breaking load / Charge de rupture



3. Inspection, points to verify Contrôle, points à vérifier




4. Compatibility Compatibilité




6. Efficiency Rendement


6A. Simple pulley system

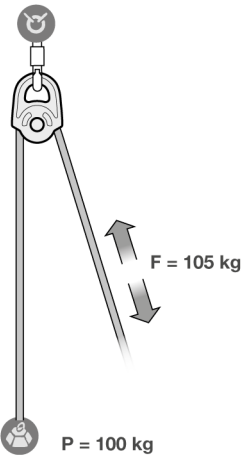


with progress capture

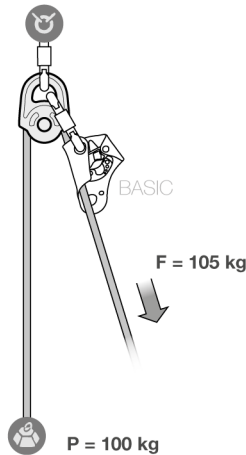


6B. 2:1 hauling system

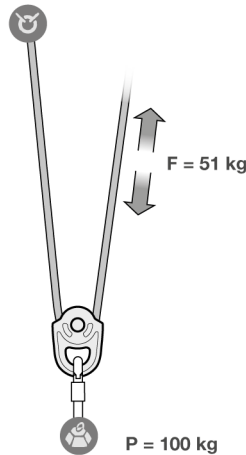

6c. 3:1 hauling system with progress capture

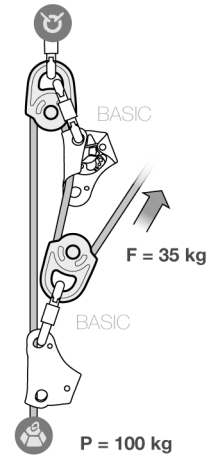

Theoretical force




	$F = P$
	$F = 1,05 P$
	$F = 2 P$


	$F = 0,5 P$
	$F = 0,51 P$
	$F = 0,66 P$

	$F = 0,33 P$
	$F = 0,35 P$
	$F = 0,57 P$

7. Progress capture systems
Systemes anti-retour

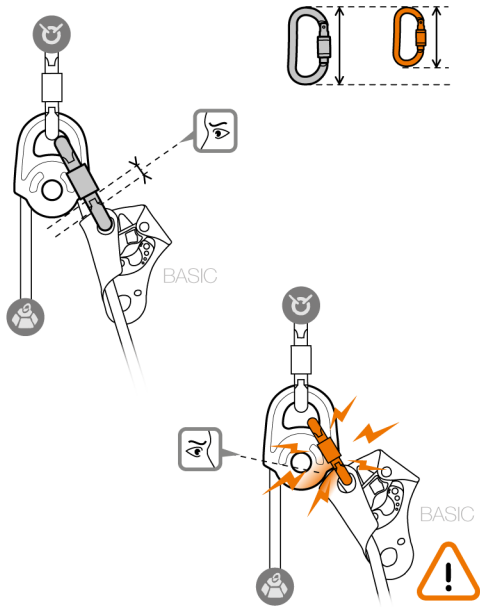

8. Positioning and redirection
Positionnement et renvoi

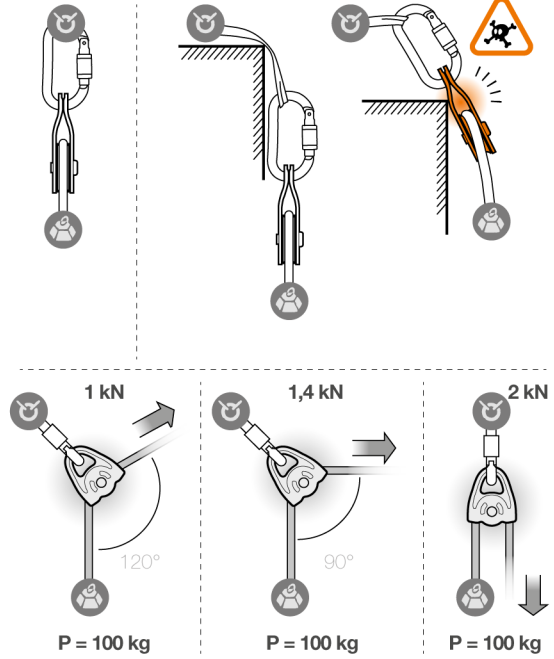

Traceability and markings
Traçabilité et marquage

e. Serial number YY M 0000000 000	a. b. 0082 Apave Exploitation France SAS 6 Rue du Général Audran 92412 Courbevoie cedex France N°0082
f. Year of manufacture	c. Traceability: datamatrix
g. Month of manufacture	d. Diameter
h. Batch number	
i. Individual identifier	
j. Standards	
k. Carefully read the instructions for use	
l. Manufacturer address	

China standards / 中国标准

When operating under the XF 494-2004: FZL-H-T 9.5/13 standard for firefighters, use only a 9.5-13 mm diameter Light or General Use kernmantle Life Safety Rope.

当在消防的XF 494-2004标准下使用时，只能使用直径9.5-13 mm的轻型或通用夹芯生命安全绳索



This product is compliant with the Regulation 2016/425 on Personal Protective Equipment as brought into UK law and amended.
Ce produit est conforme au règlement 2016/425 sur les équipements de protection individuelle tel que transposé en droit britannique et modifié.

Approved Body performing the UKCA type examination:
Organisme approuvé intervenant pour l'examen UKCA de type :

SATRA Technology Centre Limited
Wyndham Way, Telford Way,
Kettering, Northamptonshire,
NN16 8SD, United Kingdom.
N° 0321

Approved body responsible for the production control of this PPE:
Organisme approuvé responsable du contrôle de production de cet EPI :

SGS United Kingdom Ltd
Inward Way
Rosemore Business Park
Ellesmere Port, Cheshire, CH65 3EN
United Kingdom
N° 0120

Authorized Representative in UK : PETZL UK Agency, Unit 3-7, Tebay Business Park, Old Tebay, Penrith, CA10 3SS, United Kingdom